



NATURAL 60 SKIRTING RUBBER

60 Duro | Natural Rubber

FEATURES

Industrial Gaskets Natural 60 Skirting Rubber is a black, superior grade, 60 Duro blended natural and synthetic rubber strip designed for use as a sealing skirt along conveyor belts on conveyor systems.

The Natural 60 Skirting Rubber physical properties are designed specifically to create a seal once adjusted. The Skirting Rubber is worn by the conveyor belt, to reduce both material spillage and dust escaping, but also minimises wear to the conveyor belt.

Natural 60 Skirting rubber can be supplied as full slabs or as pre-cut skirting rubber strips to suit any standard conveyor system designs, ready for easy installation. It can also be supplied with pre cut holes, slots and bevels, as per specifications and drawings or custom designed to meet any application requirements.

TECHNICAL INFORMATION

Polymer	NR/SBR	
Colour	Black	
Specific Gravity	1.3	ASTM D297
Hardness	65° ± 5° Shore A	ASTM D2240
Abrasion	300mm ³ (max) @ 10N	
Tensile Strength	5.5 MPa (min)	ASTM D412
Elongation @ Break	350% (min)	ASTM D412
Temperature Range	-20°C to +70°C	

AVAILABLE SIZES


STANDARD THICKNESS 3mm, 6mm, 9mm, 12mm, 16mm, 19mm, 25mm

STANDARD ROLL SIZE 1500mm x 30mtrs, 1500mm x 10mtrs (3mm & 25mm)

Cut lengths and custom shapes are available upon request

STANDARD STRIP SIZE 75mm, 100mm, 125mm, 150mm, 200mm, 250mm, 300mm x 30mtrs

Strips can also be supplied at custom widths or with a 45 degree bevel upon request

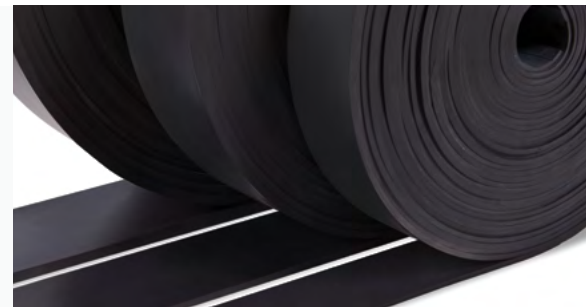

APPLICATIONS

Natural 60 Skirting Rubber has been designed primarily for use as a sealing side skirt along the conveyor belt on conveyor systems but can be used for any application which requires an economical rubber skirting strip.