



DONIFLON® 2030



DONIFLON® 2030 is structurally enhanced PTFE gasket sheet filled with barium sulfate. It has outstanding chemical resistance to various media, same as DONIFLON® 900E; especially recommended for strong alkaline solutions under moderate temperatures and hydrofluoric acid (up to 48%). This material has enhanced creep performance compared to plain PTFE material. It is the ideal gasket material for equipment where higher bolt loads are required.

PROPERTIES

		SEALABILITY PERFORMANCE	CHEMICAL RESISTANCE
SUPERIOR			
EXCELLENT	MECHANICAL RESISTANCE		
VERY GOOD			
GOOD		THERMAL RESISTANCE	
MODERATE			

APPROPRIATE INDUSTRIES & APPLICATIONS

	POTABLE WATER SUPPLY
	STEAM SUPPLY
	GAS SUPPLY
	CHEMICAL INDUSTRY
	PETROCHEMICAL INDUSTRY
	VALVES
	PHARMACEUTICAL INDUSTRY

Composition

PTFE, barium sulfate

Color

Off-white

Approvals

Please inquire


TECHNICAL DATA

Typical values for 2 mm thickness

Density	DIN 28090-2	g/cm ³	3.0
Compressibility	ASTM F36J	%	6
Recovery	ASTM F36J	%	40
Tensile strength	ASTM F152	MPa	10
Stress resistance	DIN 52913		
30 MPa, 16 h, 150 °C		MPa	13
Specific leak rate	DIN 3535-6	mg/(s·m)	0.002
pH range			0-14
Operating conditions			
Minimum temperature		°C/°F	-200/-328
Maximum temperature		°C/°F	260/500
Pressure		bar/psi	80/1160

P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

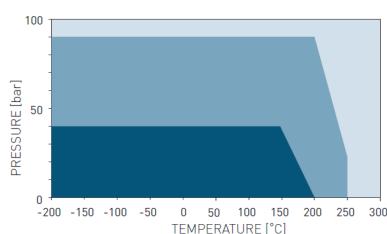

- General suitability - Under common installation practices and chemical compatibility.
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended.
- Limited suitability - Technical consultation is mandatory.

P-T diagram indicates the maximum permissible combination of internal pressure and service temperature which can be simultaneously applied for a given gasket's thickness, size and tightness class. Given the wide variety of gasket applications and service conditions, these values should only be regarded as a guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.

Standard dimension of sheets

Size (mm): 1500 x 1500
 Thickness (mm): 1.5 | 2.0 | 3.0
 Other sizes and thicknesses available on request.

Acetamide	+
Acetic acid, 10%	+
Acetic acid, 100% (Glacial)	+
Acetone	+
Acetonitrile	+
Acetylene [gas]	+
Acid chlorides	+
Acrylic acid	+
Acrylonitrile	+
Adipic acid	+
Air [gas]	+
Alcohols	+
Aldehydes	+
Alum	+
Aluminum acetate	+
Aluminum chloride	+
Aluminum chloride	+
Aluminum sulfate	+
Amines	+
Ammonia [gas]	+
Ammonium bicarbonate	+
Ammonium chloride	+
Ammonium hydroxide	+
Amyl acetate	+
Anhydrides	+
Aniline	+
Anisole	+
Argon [gas]	+
Asphalt	+
Barium chloride	+
Benzaldehyde	+
Benzene	+
Benzoic acid	+
Bio-diesel	+
Bio-ethanol	+
Black liquor	+
Borax	+
Boric acid	+
Butadiene [gas]	+
Butane [gas]	+
Butyl alcohol [Butanol]	+
Butyric acid	+
Calcium chloride	+
Calcium hydroxide	+
Carbon dioxide [gas]	+
Carbon monoxide [gas]	+
Cellosolve	+
Chlorine [gas]	+
Chlorine [in water]	+
Chlorobenzene	+
Chloroform	+
Chloroprene	+
Chlorosilanes	+
Chromic acid	+
Citric acid	+
Copper acetate	+
Copper sulfate	+
Creosote	+
Cresols [Cresylic acid]	+
Cyclohexane	+
Cyclohexanol	+
Cyclohexanone	+
Decalin	+
Dextrin	+
Dibenzyl ether	+
Dibutyl phthalate	+
Dimethylacetamide [DMA]	+
Dimethylformamide [DMF]	+
Dioxane	+
Diphyl [Dowtherm A]	+
Esters	+
Ethane [gas]	+
Ethers	+
Ethyl acetate	+
Ethyl alcohol [Ethanol]	+
Ethyl cellulose	+
Ethyl chloride [gas]	+
Ethylene [gas]	+
Ethylene glycol	+
Formaldehyde [Formalin]	+
Formamide	+
Formic acid, 10%	+
Formic acid, 85%	+
Formic acid, 100%	+
Freon-12 [R-12]	+
Freon-134a [R-134a]	+
Freon-22 [R-22]	+
Fruit juices	+
Fuel oil	+
Gasoline	+
Gelatin	+
Glycerine [Glycerol]	+
Glycols	+
Helium [gas]	+
Heptane	+
Hydraulic oil [Glycol based]	+
Hydraulic oil [Mineral type]	+
Hydraulic oil [Phosphate ester based]	+
Hydrazine	+
Hydrocarbons	+
Hydrochloric acid, 10%	+
Hydrochloric acid, 37%	+
Hydrofluoric acid, 10%	+
Hydrofluoric acid, 48%	+
Hydrogen [gas]	+
Iron sulfate	+
Isobutane [gas]	+
Iooctane	+
Isoprene	+
Isopropyl alcohol [Isopropanol]	+
Kerosene	+
Ketones	+
Lactic acid	+
Lead acetate	+
Lead arsenate	+
Magnesium sulfate	+
Maleic acid	+
Malic acid	+
Methane [gas]	+
Methyl alcohol [Methanol]	+
Methyl chloride [gas]	+
Methylene dichloride	+
Methyl ethyl ketone (MEK)	+
N-Methyl-pyrrolidone (NMP)	+
Milk	+
Mineral oil (ASTM no.1)	+
Motor oil	+
Naphtha	+
Nitric acid, 10%	+
Nitric acid, 65%	+
Nitrobenzene	+
Nitrogen [gas]	+
Nitrous gases [NOx]	+
Octane	+
Oils {Essential}	+
Oils {Vegetable}	+
Oleic acid	+
OLEUM [Sulfuric acid, fuming]	+
Oxalic acid	+
Oxygen [gas]	+
Palmitic acid	+
Paraffin oil	+
Pentane	+
Perchloroethylene	+
Petroleum [Crude oil]	+
Phenol [Carbolic acid]	+
Phosphoric acid, 40%	+
Phosphoric acid, 85%	+
Phthalic acid	+
Potassium acetate	+
Potassium bicarbonate	+
Potassium carbonate	+
Potassium chloride	+
Potassium cyanide	+
Potassium dichromate	+
Potassium hydroxide	?
Potassium iodide	+
Potassium nitrate	+
Potassium permanganate	+
Propane [gas]	+
Propylene [gas]	+
Pyridine	+
Salicylic acid	+
Seawater/brine	+
Silicones [oil/grease]	+
Soaps	+
Sodium aluminate	?
Sodium bicarbonate	+
Sodium bisulfite	+
Sodium carbonate	+
Sodium chloride	+
Sodium cyanide	+
Sodium hydroxide	?
Sodium hypochlorite [Bleach]	+
Sodium silicate [Water glass]	+
Sodium sulfate	+
Sodium sulfide	+
Starch	+
Steam	+
Stearic acid	+
Styrene	+
Sugars	+
Sulfur	+
Sulfur dioxide [gas]	+
Sulfuric acid, 20%	+
Sulfuric acid, 98%	?
Sulfuryl chloride	+
Tar	+
Tartaric acid	+
Tetrahydrofuran (THF)	+
Thionyl chloride	+
Titanium tetrachloride	?
Toluene	+
2,4-Toluenediisocyanate	+
Transformer oil [Mineral type]	+
Trichloroethylene	+
Vinegar	+
Vinyl chloride [gas]	+
Vinylidene chloride	+
Water	+
White spirits	+
Xylenes	+
Xylenol	+
Zinc sulfate	+

CHEMICAL RESISTANCE CHART

The recommendations made here are intended as a guideline for the selection of a suitable gasket type. As the function and durability of products depend upon a number of factors, the data may not be used to support any warranty claims.

⊕ Recommended

? Recommendation depends on operating conditions

- Not recommended



DONIT TESNIT, d.o.o.

Cesta komandanta Staneta 38
 1215 Medvode, Slovenia, EU

Phone: +386 (0)1 582 33 00

Fax: +386 (0)1 582 32 06
 +386 (0)1 582 32 08

Web: www.donit.eu

E-mail: info@donit.eu

For disclaimer please visit <http://donit.eu/disclaimer/>

Copyright © DONIT TESNIT, d.o.o.

All rights reserved

Date of issue: 09.2019 / TDS-D2030-09-2019